

ELECTRIC TEPPAN TABLE

CARBON LAMP HEATER

for commercial use



Table Top Cooking with Far Infrared Heating

Far Infrared Heating ensures consistent and thorough heat penetration during cooking, while the digital control allows for simple temperature control.

Carbon Lamp Heater




Control Panel



【 Parts List 】

- ①Table Top
- ②Table Leg
- ③Teppan Plate
- ④Teppan Frame
- ⑤Heater Unit
- ⑥Control Panel
- ⑦Drain Pan
- ⑧Scrap receptacle
- ⑨Scrap Chute
- ⑩Air Intake
- ⑪Table Leg Adjuster

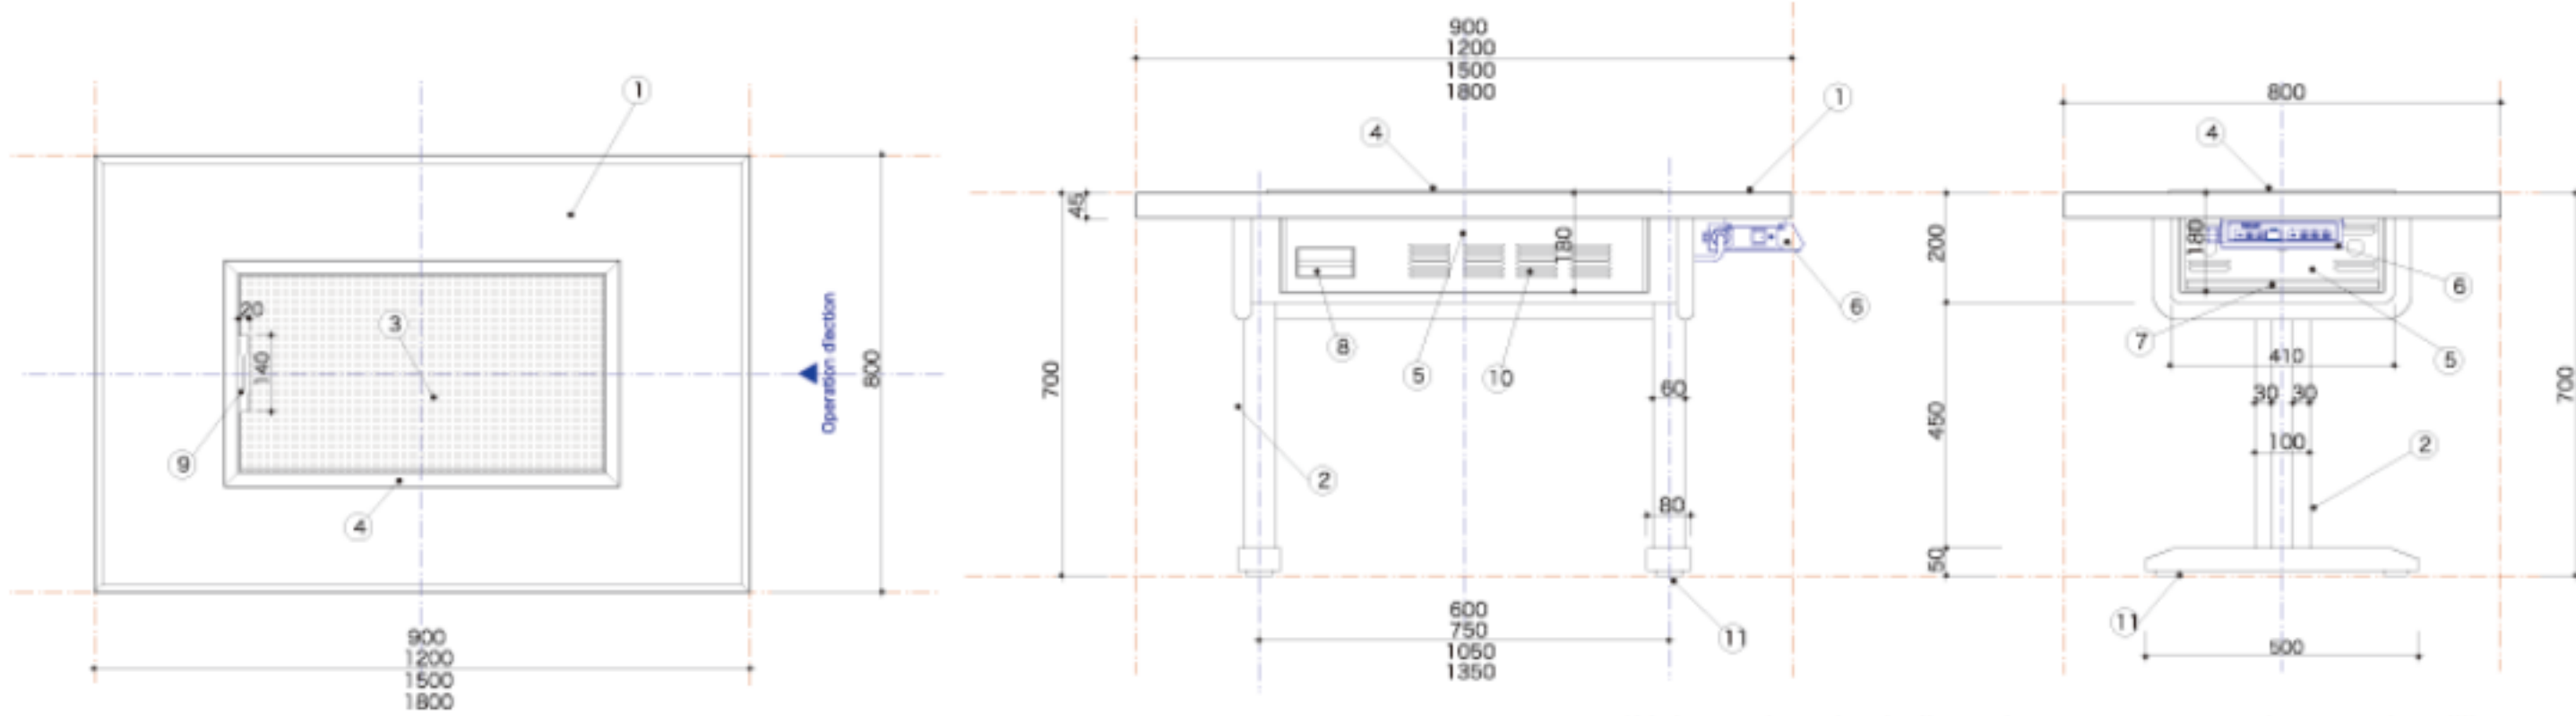

*Unless otherwise indicated, measurement values are in millimeters.

Specifications(North America)

Item Number	No. of Seats	Table Style	Table Dimensions - Inches (mm)			Heater Model	Teppan Dimensions - Inches (mm)			Unit Weight (kg)	Power	Power Consumption	Controller
			Width	Depth	Height		Width	Depth	Thickness				
K2E-90T-KYU	2	High	35.4 (900)	31.5 (800)	27.6 (700)	Type 450	20.5 (520)	14.2 (360)	0.4 (9)	49	1 ϕ-230V	1.32kw	• 4-Button • Touch-Sensitive • Off/Warm Switch • Medium/High Heat
K2E-90T-KZU		Low			13.8 (350)					36			
K2E-120T-KYU	4	High	47.2 (1200)		27.6 (700)	Type 600	26.4 (670)			59		2.39kw	
K2E-120T-KZU		Low			13.8 (350)					45			
K2E-150T-KYU	6	High	59.1 (1500)		27.6 (700)	Type 900	38.2 (970)			72		3.18kw	
K2E-150T-KZU		Low			13.8 (350)					58			
K2E-180T-KYU	Over 6	High	70.9 (1800)		27.6 (700)	Type 1200	50.0(1,270)		0.5 (12)	96		2.39kw×2	
K2E-180T-KZU		Low			13.8 (350)					81			

Specifications(Europe)

Item Number	No. of Seats	Table Style	Table Dimensions - Inches (mm)			Heater Model	Teppan Dimensions - Inches (mm)			Unit Weight (kg)	Power	Power Consumption	Controller
			Width	Depth	Height		Width	Depth	Thickness				
K2E-90T-KYU(CE)	2	High	35.4 (900)	31.5 (800)	27.6 (700)	Type 450	20.5 (520)	14.2 (360)	0.4 (9)	49	1 ϕ -220V	1.2kw	• 4-Button • Touch-Sensitive • Off/Warm Switch • Medium/High Heat
K2E-90T-KZU(CE)		Low			13.8 (350)					36			
K2E-120T-KYU(CE)	4	High	47.2 (1200)		27.6 (700)	Type 600	26.4 (670)			59		2.18kw	
K2E-120T-KZU(CE)		Low			13.8 (350)					45			
K2E-150T-KYU(CE)	6	High	59.1 (1500)		27.6 (700)	Type 900	38.2 (970)			72		2.9kw	
K2E-150T-KZU(CE)		Low			13.8 (350)					58			
K2E-180T-KYU(CE)	Over 6	High	70.9 (1800)		27.6 (700)	Type 1200	50.0(1,270)		0.5 (12)	96		2.9kw×2	
K2E-180T-KZU(CE)		Low			13.8 (350)					81			